


Lightbar SR-5 LED with beacon adapters

Lightbar is a signalling device used for maintenance vehicles, gritters, road sweepers, marking vehicles, police and fire-brigade vehicles. **This lightbar includes two adapters** to attach flexible or firm-base beacons to improve the warning effect.

- > **5 LED lamps** ø200mm **EN 12352 L8H**
- > electronics automatically reduce lamp luminous intensity at night and includes reverse polarity protection
- > moreover, the electronics protect the battery from deep discharge by disconnecting the lightbar symbols depending on the current battery status
- > **remote control with 10m cable** for control and optical check of the function modes
- > all operational information are clearly displayed on the remote control
- > **10m power supply cable** to be installed on the vehicle
- > using clamps, the lightbar can be attached to a profile of up to (WxH) 40x30mm (roof racks)
- > **basic width of the lightbar is 1406mm**, other available widths 1550, 1800, 2050 and 2310mm
- > includes **two adapters** to attach **flexible or firm-base beacons**
- > beacons are switched on separately by a switch with an indicator light
- > beacons are not included in the delivery, suitable beacons can be found in the list of accessories below
- > the lightbar has 6 modes
 - Mode 1. Light moves to the left
 - Mode 2. Light moves to the right
 - Mode 3. Two side lights are flashing
 - Mode 4. Even lights are flashing against odd ones
 - Mode 5. Lights move from the centre to the sides
 - Mode 6. All lights are flashing simultaneously

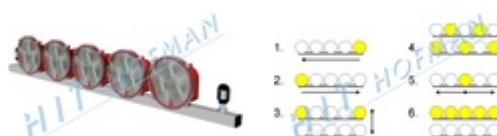

THE PRODUCT SECTION OFFERS ALSO A LIGHTBAR WITH A LOWER NUMBER OF LAMPS SR-4 LED

Technical data for consumption in the chart do not refer to the beacons for modes 4. and 6., for modes 1. and 2. the consumption is even 40% lower.

TECHNICAL DATA

| | |
|--------------------------|----------------------|
| Power supply | 12/24V= |
| Current consumption 12V= | day 0,7A night 0,35A |
| Average consumption 12V= | 12,6Ah / 24 hours |
| Current consumption 24V= | day 0,4A night 0,2A |
| Average consumption 24V= | 7,1Ah / 24 hours |
| Flashing frequency | 60/min. |
| Dimensions (WxHxL) | 1406x230x140mm |
| Weight | 7,8kg |

PRODUCTS

| Order no. | Product name | Quantity |
|--------------|--|----------|
| 1-160-205025 | Lightbar SR-5 LED with beacon adapters | 1 pc. |
| 1-160-205024 | Lightbar SR-4 LED with beacon adapters | 1 pc. |
| 1-150-990100 | SR - Additional charge over basic dimension 250mm | 1 pc. |
| 1-150-990200 | SR - Additional charge over basic DO in 5m | 1 pc. |

ACCESSORIES

| Order no. | Product name | Quantity |
|----------------|---|----------|
| 2-010-101080 | Beacon LED-CR8 - T/L12-24/O pole mount | 1 pc. |
| 2-010-102160 | Beacon LED-BPL - P/L12-24/O flexi mount | 1 pc. |
| 2-010-102060 | Beacon LED-PAL - P/L12-24/O flexi | 1 pc. |
| 2-010-010210 | Mini beacon M - P/H12/O flexi mount | 1 pc. |
| 2-010-010220 | Mini beacon M - P/H24/O flexi mount | 1 pc. |
| 3-580-10000100 | Remote control bracket DO-082 | 1 pc. |