



Lightbar SR-5 with beacon holders

Lightbar is a signalling device used for maintenance vehicles, gritters, road sweepers, marking vehicles, police and fire-brigade vehicles. **This lightbar includes holders** enabling to attach the **beacons by three screws** to improve the warning effect.

- > **5 halogen lamps** ø200mm **EN 12352 L8H**
- > electronics automatically reduce lamp luminous intensity at night and includes reverse polarity protection
- > moreover, the electronics protect the battery from deep discharge by disconnecting the light arrow symbols depending on the current battery status
- > **remote control with 10m cable** for control and optical check of the function modes
- > all operational information are clearly displayed on the remote control
- > **10m power supply cable** to be installed on the vehicle
- > using clamps, the lightbar can be attached to a profile of up to (WxH) 40x30mm (roof racks)
- > **basic width of the bar is 1476mm**, other available widths are 1620, 1870 and 2120mm

- > includes **two holders** for attaching **beacons by three screws**
- > beacons are switched on separately using a switch with an indicator light
- > beacons are not included in the delivery, suitable beacons can be found in the list of accessories below

- > the lightbar has 6 modes
 - Mode 1. Light moves to the left
 - Mode 2. Light moves to the right
 - Mode 3. Two side lights are flashing
 - Mode 4. Even lights are flashing against odd ones
 - Mode 5. Lights move from the centre to the sides
 - Mode 6. All lights are flashing simultaneously

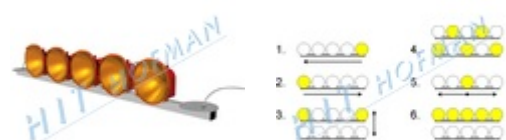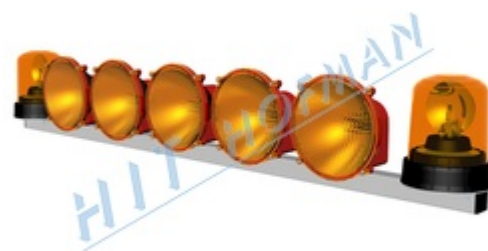

Technical data for consumption in the chart do not refer to the beacons for modes 4. and 6., for modes 1. and 2. the consumption is even 60% lower.

TECHNICAL DATA

| | |
|--------------------------|----------------------|
| Power supply | 12/24V= |
| Current consumption 12V= | day 3,6A night 2,25A |
| Average consumption 12V= | 70Ah / 24 hours |
| Current consumption 24V= | day 2,0A night 1,26A |
| Average consumption 24V= | 39,4Ah / 24 hours |
| Flashing frequency | 55/min. |
| Dimensions (WxHxL) | 1476x230x160mm |
| Weight | 7,55kg |

PRODUCTS

| Order no. | Product name | Quantity |
|--------------|--|----------|
| 1-160-300025 | Lightbar SR-5 with beacon holders | 1 pc. |
| 1-150-990100 | SR - Additional charge over basic dimension 250mm | 1 pc. |
| 1-150-990200 | SR - Additional charge over basic DO in 5m | 1 pc. |

ACCESSORIES

| Order no. | Product name | Quantity |
|----------------|--|----------|
| 2-010-102020 | Beacon LED-PAL - Š/L12-24/O screws | 1 pc. |
| 2-010-102120 | Beacon LED-BPL - S/L12-24/O screws | 1 pc. |
| 2-010-101020 | Beacon LED-CR8 - S/L12-24/O screws | 1 pc. |
| 3-580-10000100 | Remote control bracket DO-082 | 1 pc. |