



## Lightbar SR-TURBO LED

Lightbar is a signalling device used for maintenance vehicles, gritters, road sweepers and marking vehicles.

- > **10 LED lamps** ø200mm **EN 12352 L8H**
- > electronics automatically reduce lamp luminous intensity at night and includes reverse polarity protection
- > moreover, the electronics protect the battery from deep discharge by disconnecting the light arrow symbols depending on the current battery status
- > **remote control with 15m cable** for control and optical check of the function modes
- > all operational information are clearly displayed on the remote control
- > **10m power supply cable** to be installed on the vehicle
- > the lightbar is attached by screws
  
- > the lightbar has 5 modes

- Mode 1. Light arrow to the left is flashing
- Mode 2. Light arrow to the right is flashing
- Mode 3. Two side lights are flashing
- Mode 4. Lights move from the centre
- Mode 5. Both arrows are flashing simultaneously

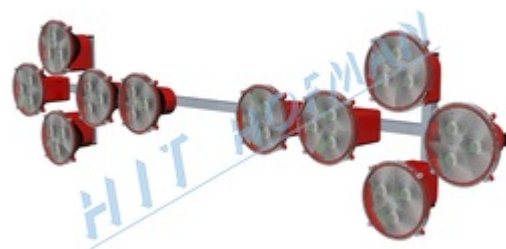

**Technical data for consumption in the chart are for one arrow (5 lamps).**

### TECHNICAL DATA

Power supply	12/24V=
Current consumption 12V=	day 0,7A night 0,35A
Average consumption 12V=	12,6Ah / 24 hours
Current consumption 24V=	day 0,4A night 0,2A
Average consumption 24V=	7,1Ah / 24 hours
Flashing frequency	60/min.
Dimensions (WxHxL)	2100x535x170mm
Weight	13kg

## PRODUCTS

Order no.	Product name	Quantity
1-160-105010	<b>Lightbar SR-TURBO LED</b>	1 pc.

## ACCESSORIES

Order no.	Product name	Quantity
3-580-10000100	<a href="#"><u>Remote control bracket DO-082</u></a>	1 pc.