

SS - Set of two signalling lamps SLS-2 LED


The set of two signalling LED lamps is to be installed on the light arrow with frame.

- > 2 signalling LED lamps ø200mm **EN 12352 L8H**
- > signalling lamps improve the warning effect of the light arrow

Technical data for consumption refer only to the set of two signalling lamps.

TECHNICAL DATA

| | |
|--------------------------|-----------------------|
| Power supply | 12/24V= |
| Current consumption 12V= | day 0,2A night 0,07A |
| Average consumption 12V= | 3,2Ah / 24 hours |
| Current consumption 24V= | day 0,12A night 0,04A |
| Average consumption 24V= | 1,8Ah / 24 hours |
| Flashing frequency | 60/min. |
| Dimensions (WxHxL) | 1266x206x141mm |
| Weight | 1,8kg |

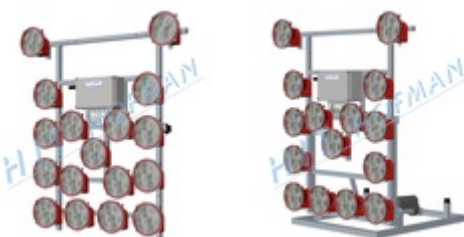

PRODUCTS

| Order no. | Product name | Quantity |
|--------------|---|----------|
| 1-140-905022 | SS - Set of two signalling lamps SLS-2 LED | 1 pc. |

ACCESSORIES

| Order no. | Product name | Quantity |
|--------------|---|----------|
| 1-120-255020 | Light arrow SS15 LED with frame | 1 pc. |
| 1-120-205020 | Light arrow SS13 LED with frame | 1 pc. |
| 1-140-455020 | Light arrow SS15 LED with frame with motor-operated lifting SD SS-2 | 1 pc. |
| 1-140-405020 | Light arrow SS13 LED with frame with motor-operated lifting SD SS-2 | 1 pc. |