



Light arrow SS13 LED

Light arrow is a signalling device used for maintenance vehicles, gritters, road sweepers, marking vehicles and trailers, or it can be used for indicating road works and the direction of its drive-around. This light arrow is also described as **Light arrow and cross type B**, warning arrow or signalling arrow.

- > **13 LED lamps** ø200mm **EN 12352 L8H**
- > electronics automatically reduce lamp luminous intensity at night and includes reverse polarity protection
- > moreover, the electronics protect the battery from deep discharge by disconnecting the light arrow symbols depending on the current battery status
- > **remote control with 15m cable** for control and optical check of the function modes
- > the light arrow has the following modes: arrow to the left, arrow to the right and cross
- > all operational information are clearly displayed on the remote control
- > **standard 10m power supply cable** to be installed on the vehicle (upon request, 4m power supply cable with battery clips)
- > light arrow can easily be attached to a profile with a maximal width 40mm

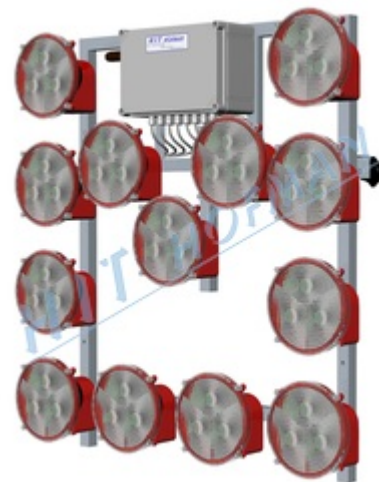

TECHNICAL DATA

Power supply	12/24V=
Current consumption 12V=	day 1,0A night 0,4A
Average consumption 12V=	16,4Ah / 24 hours
Current consumption 24V=	day 0,55A night 0,23A
Average consumption 24V=	9,2Ah / 24 hours
Flashing frequency	60/min.
Dimensions (WxHxL)	986x1013x171mm
Weight	20,9kg

THE LIGHT ARROW SS 15 HAS A MORE VISIBLE SYMBOL OF CROSS CONSISTING OF 9 LAMPS

PRODUCTS

Order no.	Product name	Quantity
1-120-105020	Light arrow SS13 LED	1 pc.

ACCESSORIES

ACCESSORIES

Order no.	Product name	Quantity
1-920-020100	Portable base with battery box for DZ+SS	1 pc.
2-890-010020	Battery 12V/180Ah	1 pc.
1-140-100010	Manually collapsible frame for light arrows SD SS-3	1 pc.
1-035-020200	Wireless remote control SS15-2_02 MZS RADIO	1 pc.
3-580-10000100	Remote control bracket DO-082	1 pc.